


ChemTite®

PLUG VALVES

TFM Lined for Severe Duty



**Bubble-Tight
GUARANTEED!**

FEATURES

- Bubble-Tight Design
- *One-Piece Heavy-Duty TFM Liner
- PFA / DCI Plug
- PFA Reverse Lip Diaphragm
- In-Line Adjustability
- One-Piece A395 DCI Body
- ASME B16.10 with ISO 5211 Mounting Pad and Flange Mounting Pad
- Lockable Handle and Static Ground Spring (standard)
- Size Range: 1" to 8"
- Pressure Rating: Full Vacuum to 250 psi (17.23 bar)
- Operating Temperature: (-)20°F to (+)400°F
- Resistant To:
 - All acids
 - All solvents
 - All bleach solutions
 - All phenols
 - All caustics
 - All peroxides
 - All organic and inorganic chlorides & sulfates

*Independent Studies have Proven TFM Permeates less than PFA Liners

THE ORIGINAL IN THE USA

Since 1931, Hills-McCanna® has earned a reputation for innovative products that serve demanding applications better than before. Today, the Hills-McCanna® legacy continues with the ChemTite® series. ChemTite® products are built with American quality for peace of mind and dependability in tough chemical applications.




Phone: (616)554-3900
Fax: (616)554-9308

Hills-McCanna®
an ANDRONACO INDUSTRIES company

Designed, Engineered,
Fluoropolymer Lined and
Assembled in the USA!

ChemTite® PLUG VALVES

TFM Lined for Severe Duty

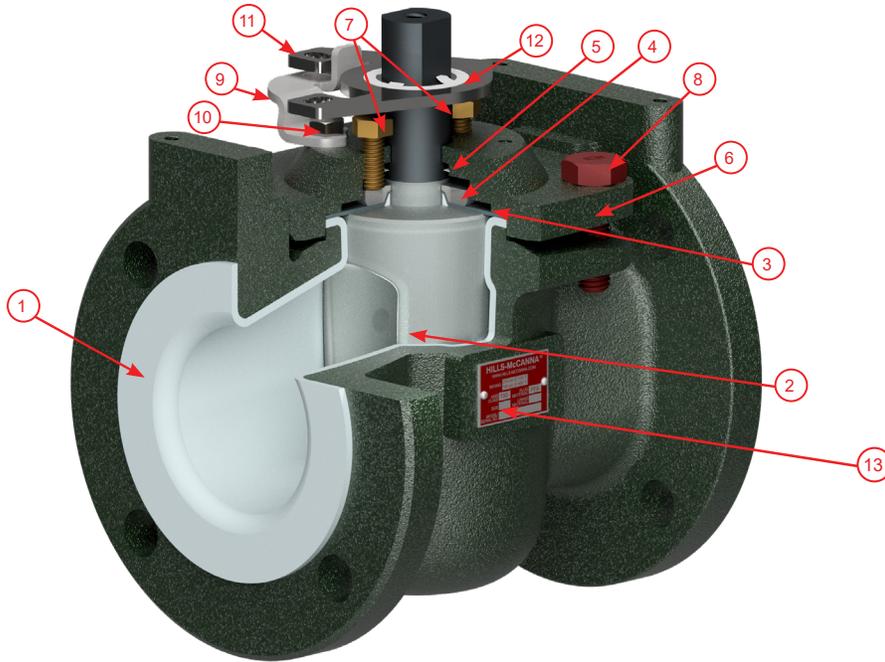

Parts List


ITEM	QTY	DESCRIPTION	MATERIAL
1	1	VALVE BODY	TFM LINED ASTM A395 DCI
2	1	PLUG	PFA LINED ASTM A395 NICKEL PLATED DCI
3	1	DIAPHRAGM	VIRGIN PFA
4	1	THRUST COLLAR	17-4 PH STAINLESS STEEL
5	1	GROUNDING SPRING	304 STAINLESS STEEL
6	1	TOP CAP	ASTM A395 DCI
7	2	ADJUSTER BOLT	ASTM A193, YELLOW ZINC PLATED GR.B7
8	4	TOP CAP BOLT	ASTM A193, ZINC PLATED, RED PTFE COATED GR.B7M
9	1	LOCKOUT BRACKET	304 STAINLESS STEEL
10	2	LOCKOUT BRACKET BOLT	18-8 STAINLESS STEEL
11	1	STOP COLLAR	304 STAINLESS STEEL
12	1	STOP COLLAR RETAINER	304 STAINLESS STEEL
13	1	NAME PLATE	STAINLESS STEEL

Actuator Sizing

VALVE SIZE	TORQUES @ MAX. DIFF. PSI	
	Clean	Slurry/Dry
1"	398 in-lbs	540 in-lbs
1 1/2"	504 in-lbs	684 in-lbs
2"	720 in-lbs	972 in-lbs
3"	1060 in-lbs	1464 in-lbs
4"	2100 in-lbs	2835 in-lbs
6"	5700 in-lbs	7695 in-lbs
8"	C/F	C/F

C/F = Consult Factory

Pressure / Temperature Curve

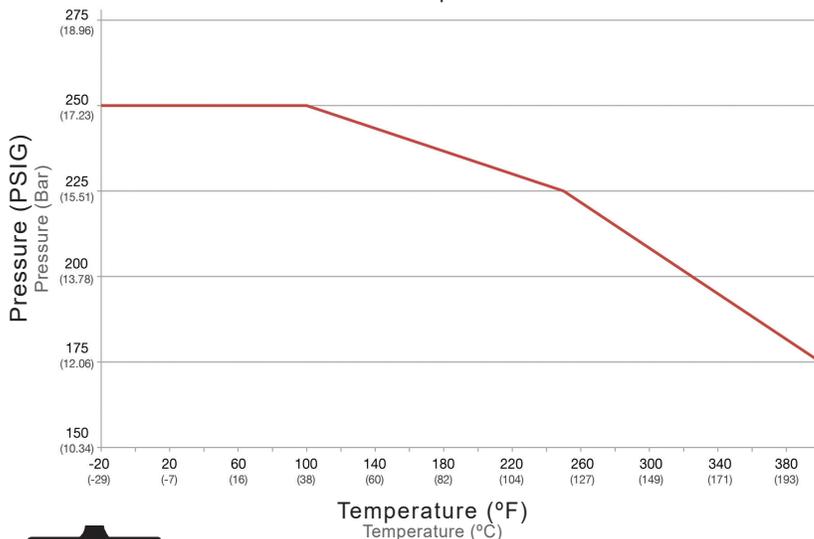

Cv Data

VALVE SIZE	FULL OPEN Cv
1"	35
1 1/2"	92
2"	201
3"	355
4"	790
6"	1120
8"	1440

Hills-McCanna®
an ANDRONACO INDUSTRIES company
4855 Broadmoor Ave, Kentwood, Michigan 49512
www.hills-mccanna.com

Phone: (616)554-3900
Fax: (616)554-9308

Hills-McCanna® information is based on technical data and testing that Hills-McCanna® believes to be reliable and is subject to change without notice. The information is intended for use by persons having technical skill, and at their own discretion and risk. Since conditions of product are outside of Hills-McCanna® control, Hills-McCanna® makes no warranties, express or implied, and assumes no liability in connection with any use of this information. Hills-McCanna® is a registered trademark of Hills-McCanna LLC.

ChemTite®
BUBBLE-TIGHT
GUARANTEED!