

Formerly known as



NORDSTROM®
POLYVALVE®

Nordstrom® is a registered trademark of Flowserve®

POLYVALVE POLY-WATER® VALVES

POLYETHYLENE VALVES

FOR WATER, WASTEWATER, AND IRRIGATION

www.AndronacoSAS.com



The Original Is Still The Best!
Over 3,000,000 Sold!

ANDRONACO s.a.s.





Polyvalve®

Why use Polyvalve Poly-Water[®] valves?


Polyvalve Poly-Water[®] valves are everything you'd expect from the company that invented polyethylene valves.

More than **three million** Polyvalves have been sold since 1976 and are in use throughout the world. Here's why:

- Rugged and reliable Polyvalve Poly-Water[®] valves are the strongest part of a polyethylene piping system.
- Drop-tight shutoff from dual elastomeric seats.
- Fused body shell removes leak paths to atmosphere.
- Multiple elastomeric stem seals.
- No metal internal parts.
- High-grade polymeric materials eliminate corrosion.
- Smooth full bore gives excellent flow characteristics in both full and standard port designs.
- Wide variety of trim for your specific application.
- Flanged and Transition end configuration available.

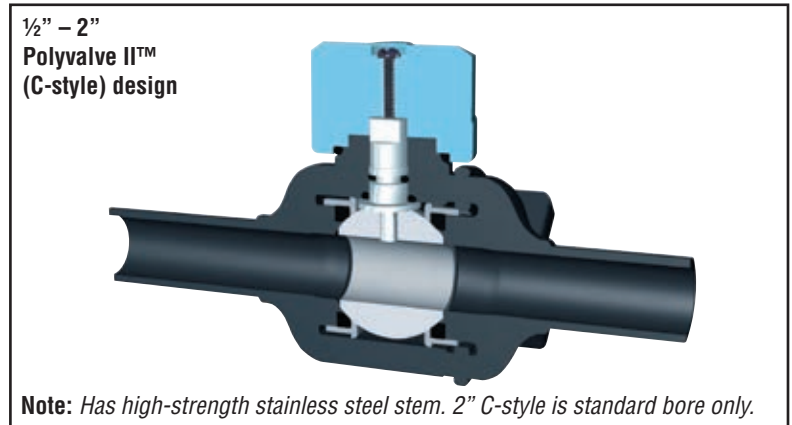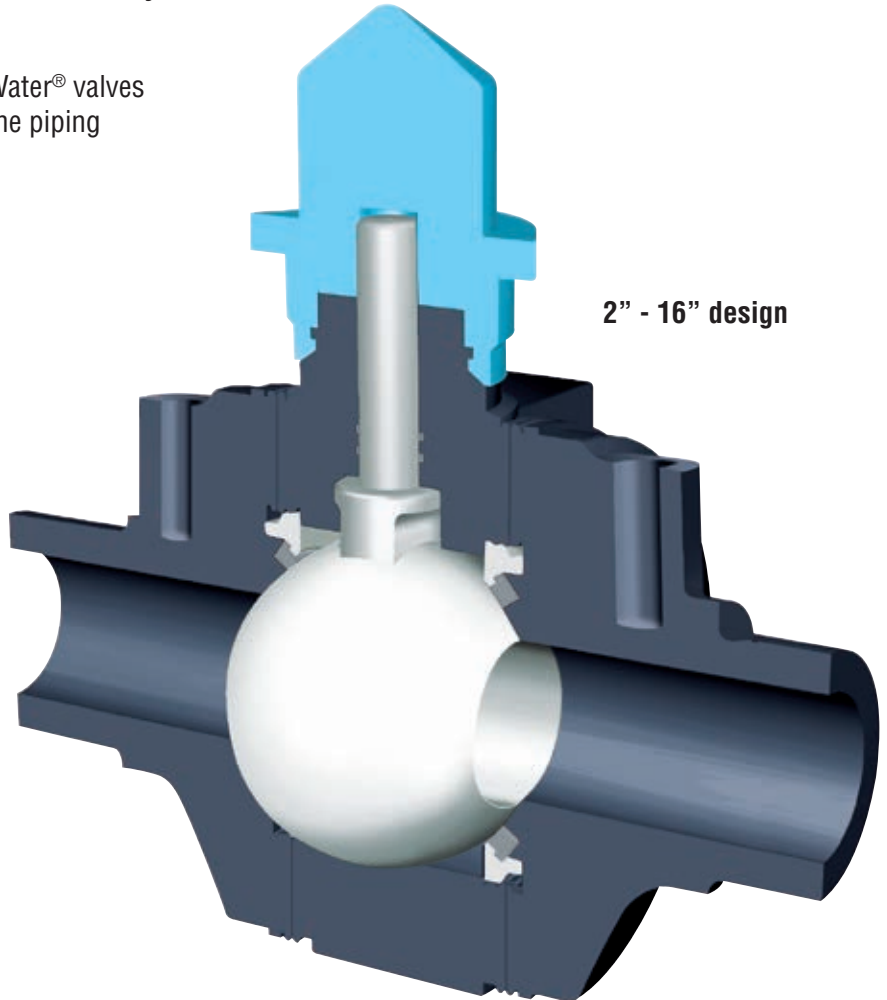


Why use polyethylene valves?

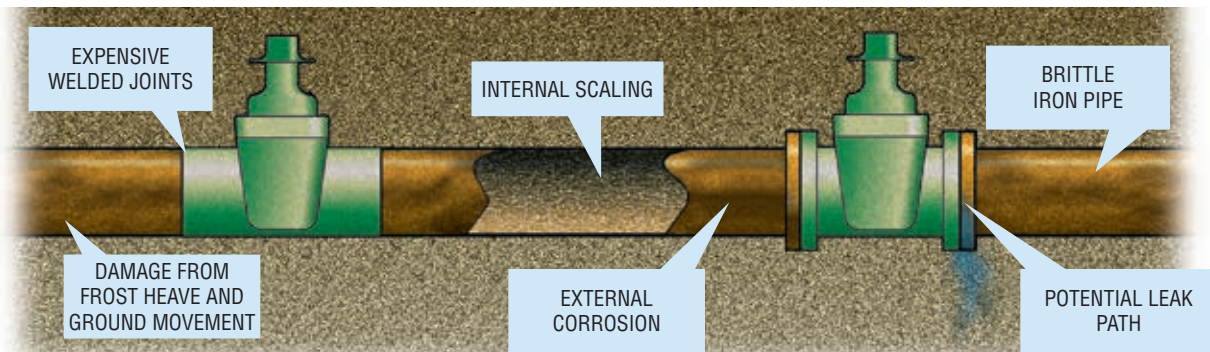


All Metal System (Welded or Bolted)

- Subject to external corrosion, internal scaling and damage from ground movement.
- Too-rigid pipe can rupture during frost heave or heavy pressure in hot weather.
- 30% of all system water is lost to leaks.

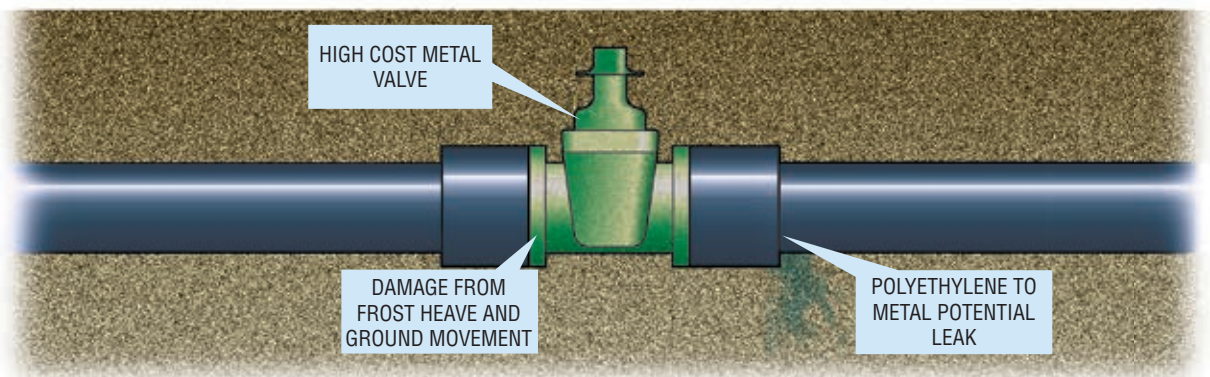

Polyethylene Pipe-to-Metal Valve Installation:

- Subject to the inherent weakness of combining incompatible materials.
- Vulnerable to ground movement during extremes of cold or heat.
- 30% of all systems water is lost to leaks.

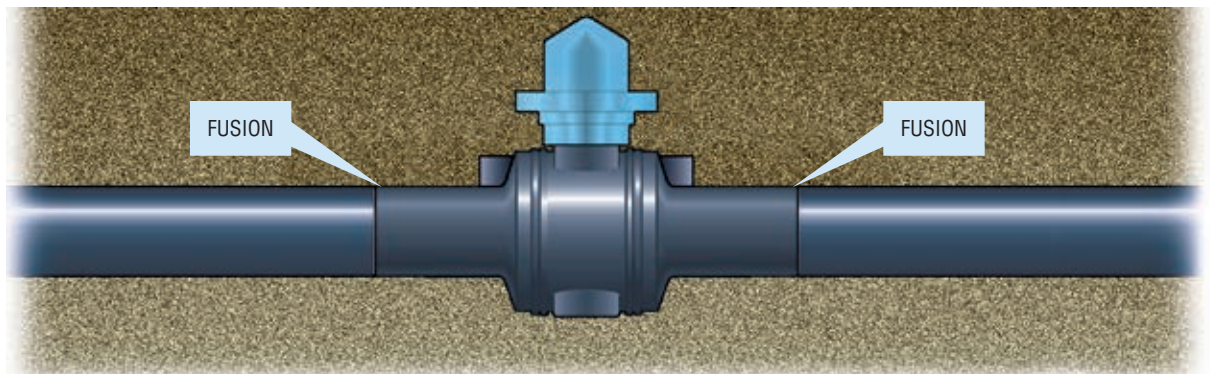

All-Polyethylene Systems:

- Intrinsicly safe—the valve is an integral part of the pipe.
- No leak points.
- No chance of corrosion.
- Flexible polyethylene systems less susceptible to ground movement.

Poly-Water[®] Valve Availability

MATERIALS

Item	Potable Water NSF / ANSI 61		Wastewater		Irrigation	
	1/2" through 2" Standard Port	2" Full Port Through 16"	1/2" through 2" Standard Port	2" Full Port Through 16"	1/2" through 2" Standard Port	2" Full Port Through 16"
Body			Polyethylene			
Adapter			Polypropylene*			
Ground Water Seal			Neoprene			
Seat	EPDM		VKM (Viton)		Buna-N	
Stem Seal	EPDM		VKM (Viton)		Buna-N	
Ball	Acetal	Polypropylene	Acetal	Polypropylene	Acetal	Polypropylene
Seat Retainer	Acetal	Polypropylene	Acetal	Polypropylene	Acetal	Polypropylene
Stem	Stainless Steel	Modified Phenylene Oxide	Stainless Steel	Modified Phenylene Oxide	Stainless Steel	Acetal

Note: 12" has gear box and cast iron 2" square nut adapter.

8" will have a choice of either gearing or wrench.

* 8" Wrench adapter material is Acetal.

Acetal should not be used in services with more than 3 parts per million chlorine.

Available with flanged ends. Contact the factory for dimensions and pricing.

Body and End Resin Chart

Polyvalve Poly-Water[®] valves are available in HDPE only.

Resin Supplier	Material Designation	Color	ASTM Material	Material Density
Dow	DGDA 2490	Black	PE3408/4710	High



Maximum Allowable Service Pressures for Polyvalve Poly-Water[®] Valves DGDA 2490 (Additional SDR sizes are available, please consult factory.)


	SDR 9		SDR 11		SDR 13.5		SDR 17	
	psig	bar	psig	bar	psig	bar	psig	bar
PE 3408/4710 Material								
@74 °F	200	13.8	160	11	128	8.8	100	6.9
@23 °C	200	13.8	160	11	128	8.8	100	6.9

* Consult factory for higher pressures.

Poly-Water® Valve Availability

Poly-Water® Valve Availability Chart (Ball Valves for Potable Water, Wastewater and Irrigation)

Size (Inches)	Size (Metric)	Body Pieces	Port	End Config.	C _v	K _v	Equiv. Feet of Pipe	Available SDRs
½	16-20	2	full†	BF* or SF**	18	260	2	9.0
¾	25	2	full†	BF	25	361	3.2	9.0, 10, 11
1	32	2	full†	BF	40	577	3.8	9.0, 11, 13.5
1¼	40	2	standard†	BF	45	649	9.6	9.0, 11, 13.5
2	55-63	3	full	BF	175	2528	3.8	9.0, 11, 17
	50-63	2	standard†	BF	110	1586	9.6	9.0, 11, 17
3	90	3	full	BF	390	5624	5.3	9.0, 11, 13.5, 17
	90	3	standard	BF	240	3461	14.1	9.0, 11, 13.5, 17
4	100-110-125	3	full	BF	700	10094	5.8	9.0, 11, 13.5, 17
	100-110	3	standard	BF	400	5768	17.8	9.0, 11, 13.5, 17
6	150-160-180	3	full	BF	1800	25957	6.1	9.0, 11, 13.5, 17
	160	3	standard	BF	900	12978	24.3	9.0, 11, 13.5, 17
8	225	3	full	BF	3650	52633	5.5	9.0, 11, 13.5, 17
	225	3	standard	BF	1350	19467	40.3	9.0, 11, 13.5, 17
10	250	3	full	BF	7000	73542	4.5	9.0, 11, 13.5, 17
12	315	3	full	BF	7000	73542	10.6	9.0, 11, 13.5, 17
14	355	3	standard	BF	7000	73542	4.5	9.0, 11, 13.5, 17
16	400	3	standard	BF	7000	73542	4.5	9.0, 11, 13.5, 17

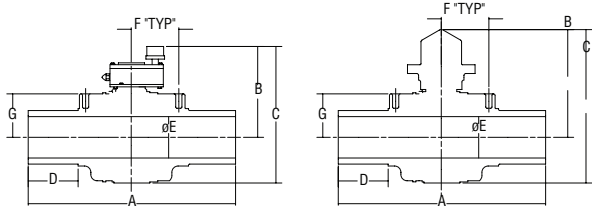

Note: C_v in US gal/min @ 1 psi Δ P
K_v in litres/min @ 1 bar Δ P

* Butt Fusion
** Socket Fusion
† Polyvalve II (C-Style) Valves

*** Available with flanged ends.
Both ductile iron or composite backup rings.
Contact the factory for dimensions and pricing.**

ANSI

Size	Port	A	B	C	D	E	Weight (lb.)
½	full	10.0	3.4	4.8	2.8	0.50	1.2
¾	full	10.0	3.4	4.8	2.8	0.75	1.2
1	standard	10.0	3.4	4.8	2.8	0.90	1.2
1¼	standard	10.0	3.4	4.8	2.8	0.90	1.2
2	full	14.7	6.4	9.1	4.2	1.82	3.8
	standard	13.0	4.5	6.5	3.7	1.30	3.1
3	full	15.0	8.0	11.4	3.5	2.50	8.9
	standard	12.8	6.4	9.1	3.6	1.90	4.5
4	full	20.0	10.4	15.0	3.1	3.62	19.5
	standard	15.0	8.0	11.4	3.8	2.50	8.9
6	full	21.0	12.6	18.6	3.9	5.20	38.0
	standard	20.0	10.4	15.0	5.3	3.62	23.0
8	full	69.8	12.5	19.9	24.0	6.60	98.0
	standard	20.0	12.6	18.6	4.0	4.78	42.5
Gear Operated							
8	full	69.8	14.8	22.2	24.0	6.30	134.0
10	full	55.25	17.5	27.7	15.75	9.91	305.0
12	full	83.8	17.5	27.7	30.0	9.91	305.0
14	standard	55.25	17.5	27.7	15.75	9.91	305.0
16	standard	55.25	17.5	27.7	15.75	9.91	305.0

Metric Valve Dimensions (mm)

Size	Port	A	B	C	D	E	Weight (kg.)
16-20	full	254	86	122	71	12.7	0.5
25	full	254	86	122	71	19.1	0.5
32	standard	254	86	122	71	22.9	0.5
40	standard	254	86	122	71	22.9	0.5
55-63	full	373	164	231	106	46.2	1.7
50-63	standard	330	115	165	94	33.0	1.4
90	full	381	203	290	89	63.5	4.0
	standard	325	164	231	91	48.0	2.0
100-110 & 125	full	508	264	381	77	91.9	8.8
	standard	381	203	290	95	63.5	4.0
150-160 & 180	full	533	320	472	99	132.1	17.2
160	standard	508	263	381	133	91.9	10.4
225	full	1773	318	504	610	168.0	44.5
	standard	508	320	472	127	102.0	19.3
Gear Operated							
225	full	1773	636	561	610	160	60.8
250	full	1403	443	704	400	251.7	138.3
315	full	2129	443	704	762	251.7	138.3
355	standard	1403	443	704	400	251.7	138.3
400	standard	1403	443	704	400	251.7	138.3

* Optional vent holes. Contact factory for other vent and bypass options.

Note: Valves are generally available in these metric sizes and may be available in other metric dimensions. Due to wall thickness considerations, all SDRs in some sizes may not be available. Contact your Polyvalve representative for exact availability.


Note: Polyvalve proudly offers pup lengths to customer specifications.

How to Order

Please provide the following information when you order:

- Valve size
- Valve body material
- Full or standard bore
- Standard Dimension Ratio (SDR) number
- Butt fusion end configuration is standard
- Flanged and transition end configuration available

Polyvalve Poly-Water[®] Valve Figure Number System

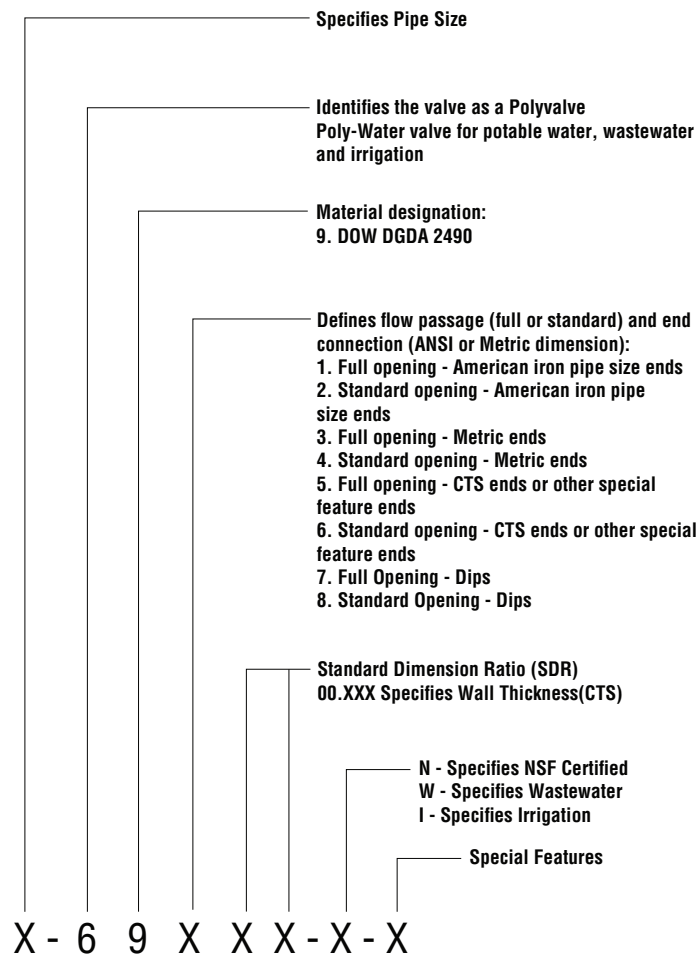

Special feature ends include integral socket ends, stub ends SDR, flanges, transition, pups, stem extensions, venting, purge, bypass, etc.



With sizes up to 16" Polyvalve Poly-Water valves come in the widest range of sizes on the market. They're shipped in cartons to shield them from ultraviolet light and protect the valve ends from damage.

FOR USE IN:

- POTABLE WATER
- WATER AND WASTEWATER*
- IRRIGATION
- STORM SEWER
- GRAVITY SEWER
- GEOTHERMAL

There are currently no AWWA standards relating to PE valves. However: ½" – 3" Polyvalve Poly-Water[®] valves are suitable for use with PE pipe and tubing complying with AWWA C901.

Sizes 4" – 16" Polyvalve Poly-Water[®] valves for potable water comply with the relevant fittings clauses of AWWA C906.

Polyvalve is an ISO 9001 certified company.

* For ½" – 2" Polyvalve II (C-style), Poly-Water[®] valves are recommended for water with a pH range of 6 to 8. For applications with pH outside of this range consult customer service.

*Available in Copper Tubing Standard sizes (CTS)

*Available in ductile iron pipe standard. (Dips)



Polyvalve

4855 Broadmoor Ave
Kentwood, MI. 49512
Ph. 616.656-2260
Fax 616.656-2264
www.PolyvalveUSA.com



POLYVALVE

**To find your local Polyvalve representative,
visit www.PolyvalveUSA.com or call 616-656-2260**

Polyvalve has established industry leadership in the design and manufacture of its products. When properly selected, this Polyvalve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Polyvalve products should be aware that Polyvalve products might be used in numerous applications under a wide variety of industrial service conditions. Although Polyvalve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Polyvalve products. The purchaser/user should read and understand the Installation Operation Maintenance (IOM) instructions included with the product, and train its employees and contractors in the safe use of Polyvalve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Polyvalve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Polyvalve at any one of its worldwide operations or offices.

© 2012 Polyvalve, Kentwood, MI, USA.